


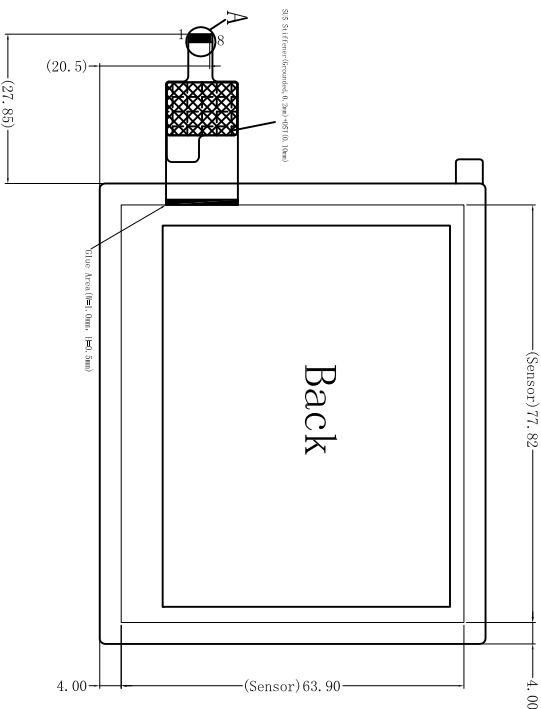


Pin	NAME
1	VDD
2	SCL
3	SDA
4	INT
5	RESET
6	GND
7	SMD10
8	NC

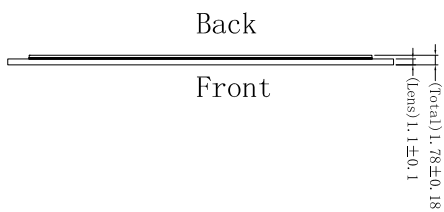

Note:
 Drive IC: TMA545
 VDD=3.3V±0.1V
 IOVDD=3.3V±0.1V
 Operating temp: -20° ~ +70° C
 Storage temp: -30° ~ +80° C
 Dimensions with () are for reference
 Dimensions with * are pivotal
 General tolerance: ±0.2mm

Detail A 1:4

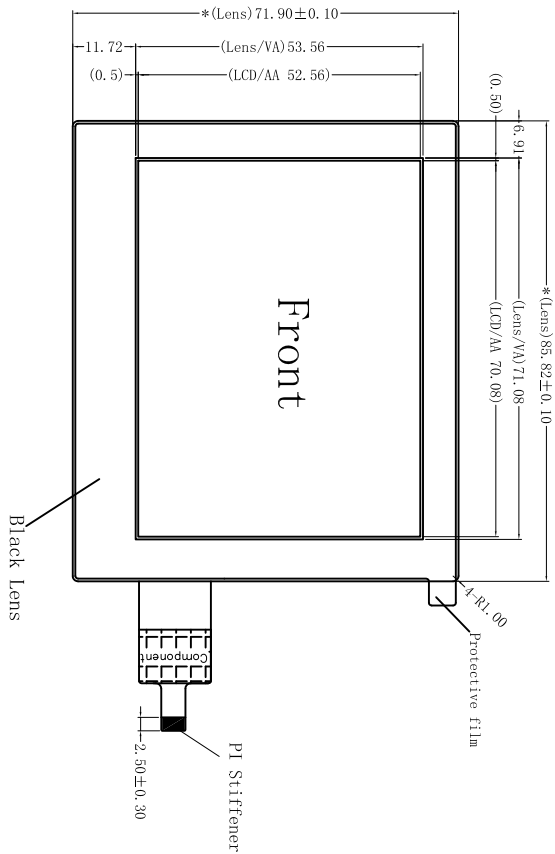

SHANTOU GOWORLD DISPLAY CO., LTD.

Tel: 0754-88192283

Fax: 0754-86339619

DRAWN:

余齐冠

2018-10-11

CHECKED:

游荣鑫

2018-10-11

APPROVED:

郑清交

2018-10-11

A00:14074Sensor.

LCM NO: GWTC15809-CTPM/A

Rev: 00

UNITS: mm

DWG NO: ED-15809-CTPM/A

SHEET 1 OF 1

