


PIN NO.	Symbol
1	VDD(3.3V)
2	IOVDD(3.3V)
3	SCL(3.3V)
4	SDA(3.3V)
5	INT(3.3V)
6	RST
7	GND
8	GND



Note:  
 IC: mXT224T  
 VDD=3.3V ± 0.1V  
 IOVDD=3.3V ± 0.1V  
 Operating temp.: -20° ~ +70° C  
 Storage temp.: -30° ~ +80° C  
 Dimensions with ( ) are for reference  
 Dimensions with \* are pivotal  
 General tolerance: ±0.30mm

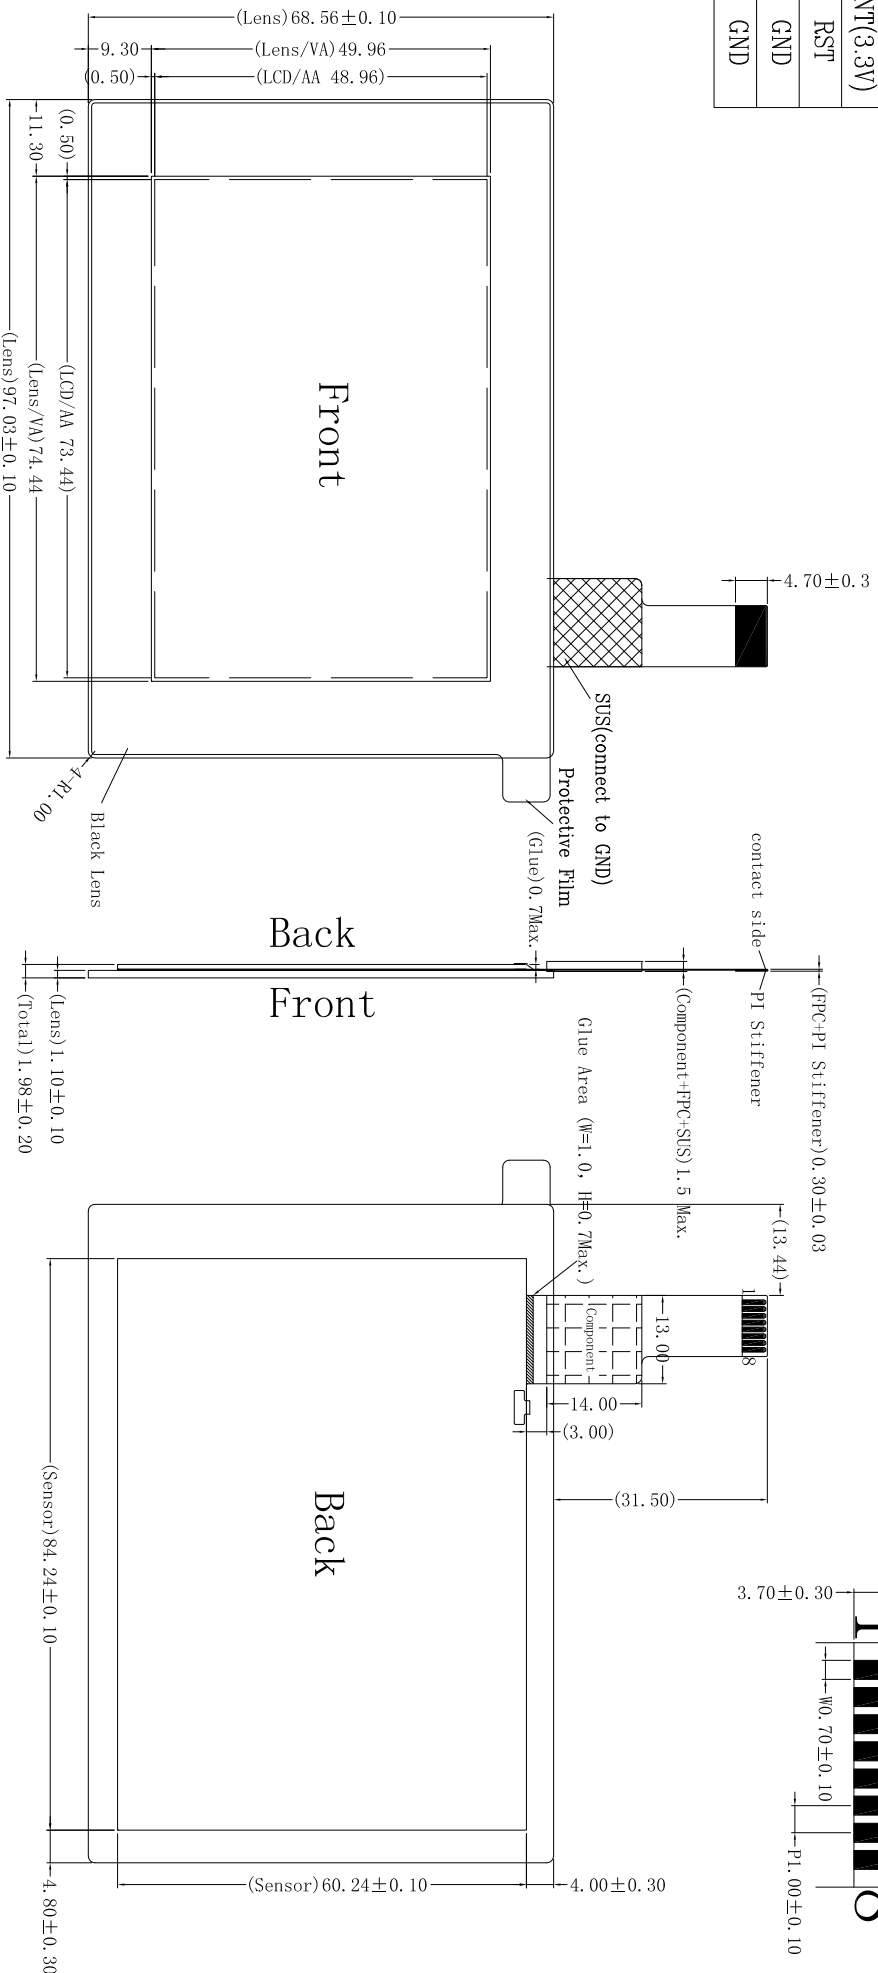

SHANTOU GOWORLD DISPLAY CO., LTD.  
 Tel:0754-88192283 Fax:0754-86339619


DRAWN: 陈佳婷  
 2018-10-22

CHECKED: 黄浩泓  
 2018-10-22

APPROVED: 郑清交  
 2018-10-22

LCM NO: GWTC15812-CTPM/A  
 DWG NO: ED-15812-CTPM/A

Rev: 00 UNITS: mm  
 SHEET 1 OF 1



A00:13684Sensor.