




PIN	NAME
1	GND
2	GND
3	IOVDD
4	RESET
5	INT
6	VDD
7	SCL
8	SDA
9	GND
10	GND

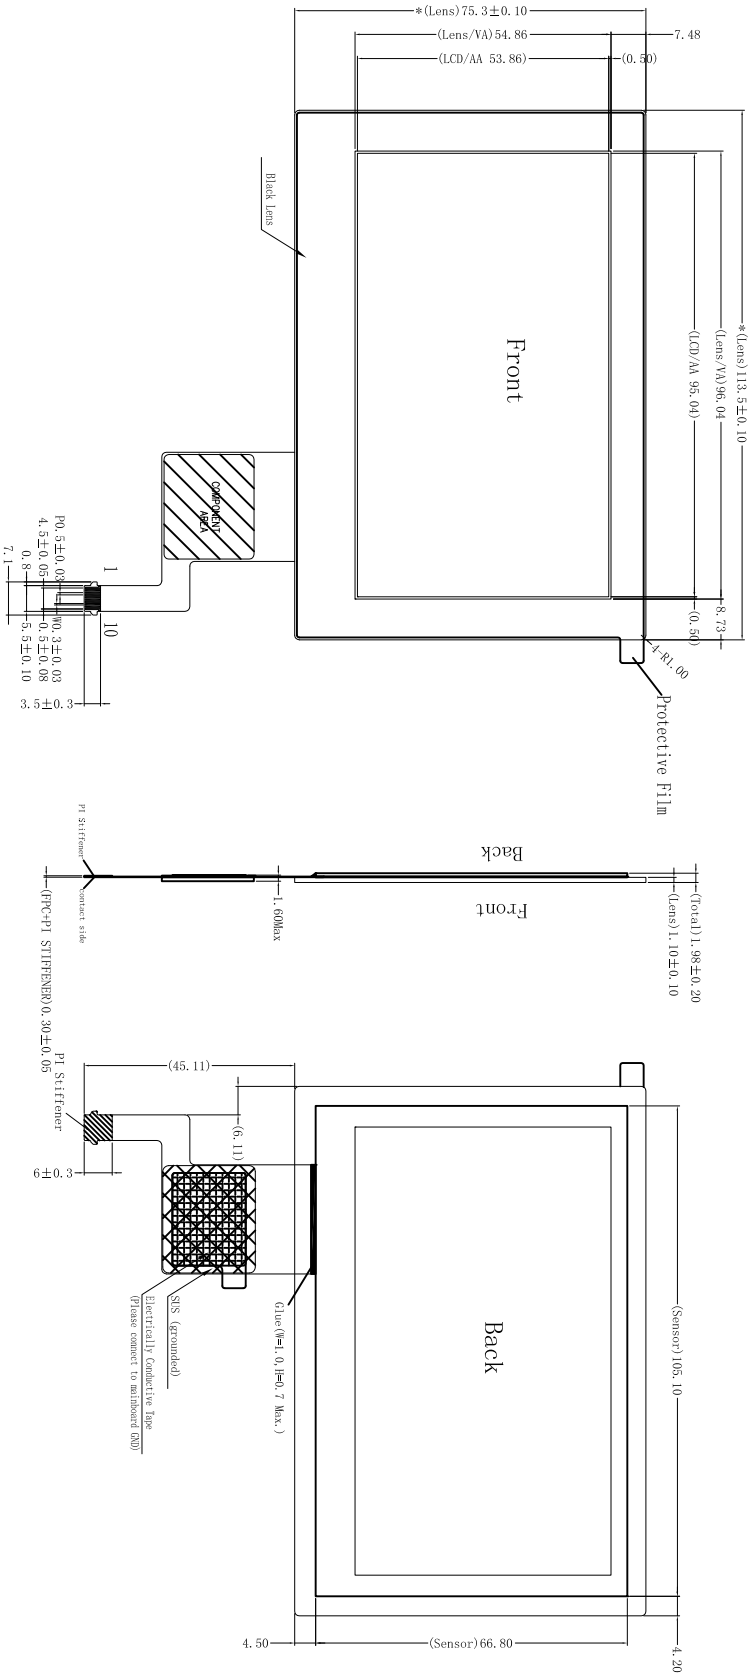

Comment:
 Driver IC: mXT224T-MAU
 VDD=3.3V ± 0.1V
 IOVDD=3.3V ± 0.1V
 Undefined tolerance : ± 0.20mm
 Operating temp.: -20~70°C
 Storage temp.: -30~80°C
 Dimensions marked with “ () ” are for reference
 Dimensions with * are pivotal

SHANTOU GOWORLD DISPLAY CO., LTD.
 Tel: 0754-86192283 Fax: 0754-86339619

DRAWN: 余齐冠 2018-10-24
CHECKED: 游荣鑫 2018-10-24
APPROVED: 郑清交 2018-10-24

LCM NO: GMT15815-CTPM/A
 DWG NO: ED-15815-CTPM/A
 Rev: 00
 UNITS: mm
 SHEET 1 OF 1

CUSTOMER APPROVAL:

