

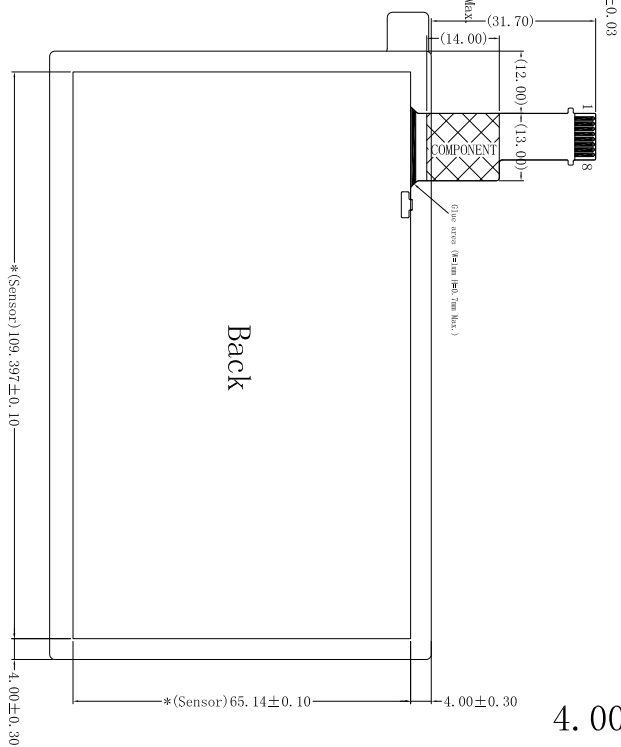


PIN NO.	Symbol
1	VDD(3.3V)
2	I0VDD(3.3V)
3	SCI(3.3V)
4	SDA(3.3V)
5	INT(3.3V)
6	RST
7	GND
8	GND

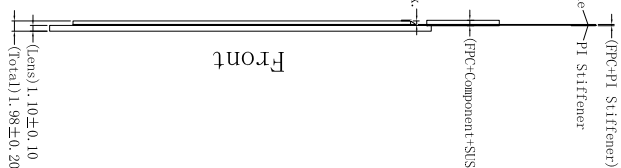

Note:
 IC: mXT224T
 VDD=3.3V ± 0.1V
 I0VDD=3.3V ± 0.1V
 Operating temp: -20° ~ +70° C
 Storage temp: -30° ~ +80° C
 Dimensions with () are for reference
 Dimensions with * are pivotal
 General tolerance: ± 0.30mm

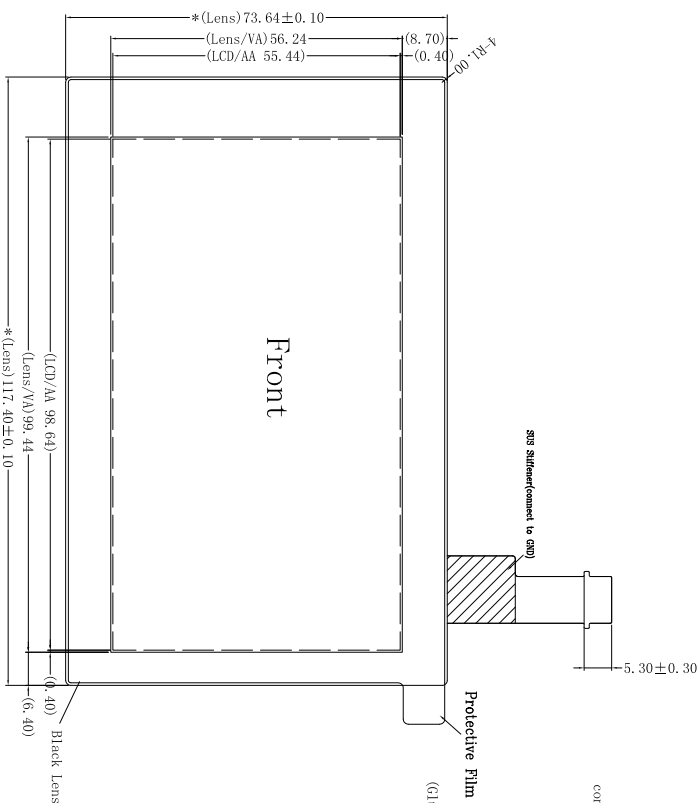

SHANTOU GOWORLD DISPLAY CO., LTD.
 Tel: 0754-88192283 Fax: 0754-86339619

DRAWN: 陈佳婷 周晓峰
 2018-10-19

CHECKED: 游崇鑫
 2018-10-19

APPROVED: 郑清交
 2018-10-19

A00:13330 Sensor.

LCM NO: GWTC15818-CTPM/A
 DWG NO: ED-15818-CTPM/A

Rev: 00 UNITS: mm
 SHEET 1 OF 1

