






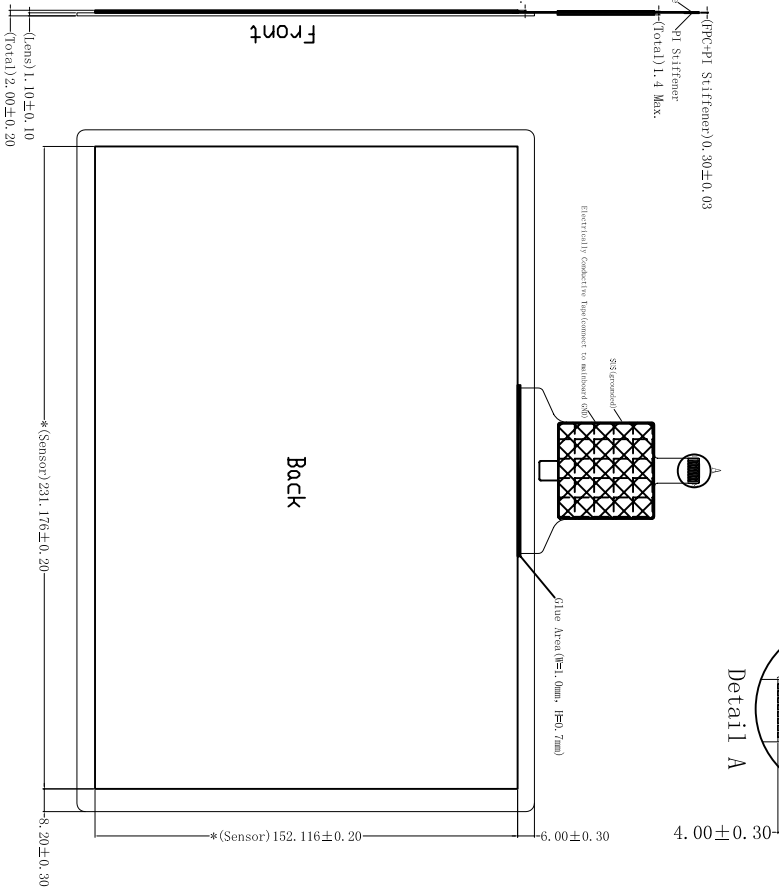

Pin No.	Symbol
1	VDD
2	TOVDD
3	SCL
4	SDA
5	INT
6	RST
7	GND
8	GND

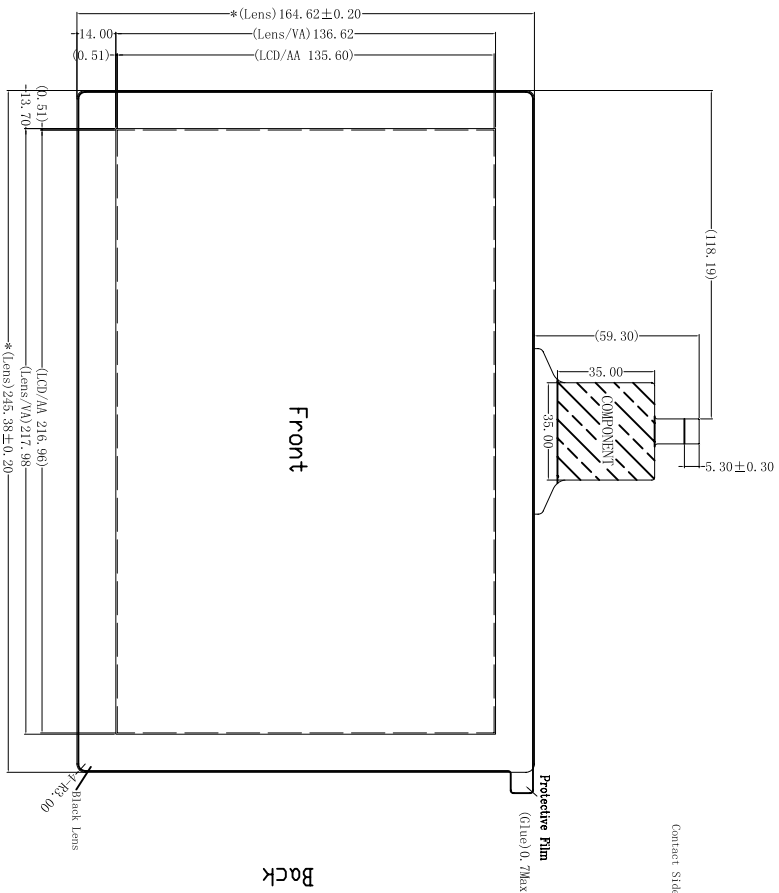

Comment:  
**IC: mXT11066T2**  
VDD=3.3V ± 0.1V  
Undefined tolerance: ±0.20mm  
Operating temp.: -20~70°C  
Storage temp.: -30~80°C  
Dimensions marked with “( )” are for reference  
Dimensions with \* are pivotal

**SHANTOU GOWORLD DISPLAY CO., LTD.**  
Tel: 0754-86192283 Fax: 0754-86339619

**DRAWN:** 陈佳婷 周晓峰 2018-10-25  
**CHECKED:** 游荣鑫 2018-10-25  
**APPROVED:** 郑清交 2018-10-25

A0015213Sensor.  
**LCM NO:** GMTG15898-CTPM/A  
**DWG NO:** RD-15898-CTPM/A  
**Rev:** 00  
**UNITS:** mm  
**SHEET** 1 OF 1

**CUSTOMER APPROVAL:**

