




PIN NO.	Symbol
1	VDD
2	I/OVDD
3	SCL
4	SDA
5	INT
6	RST
7	GND
8	GND

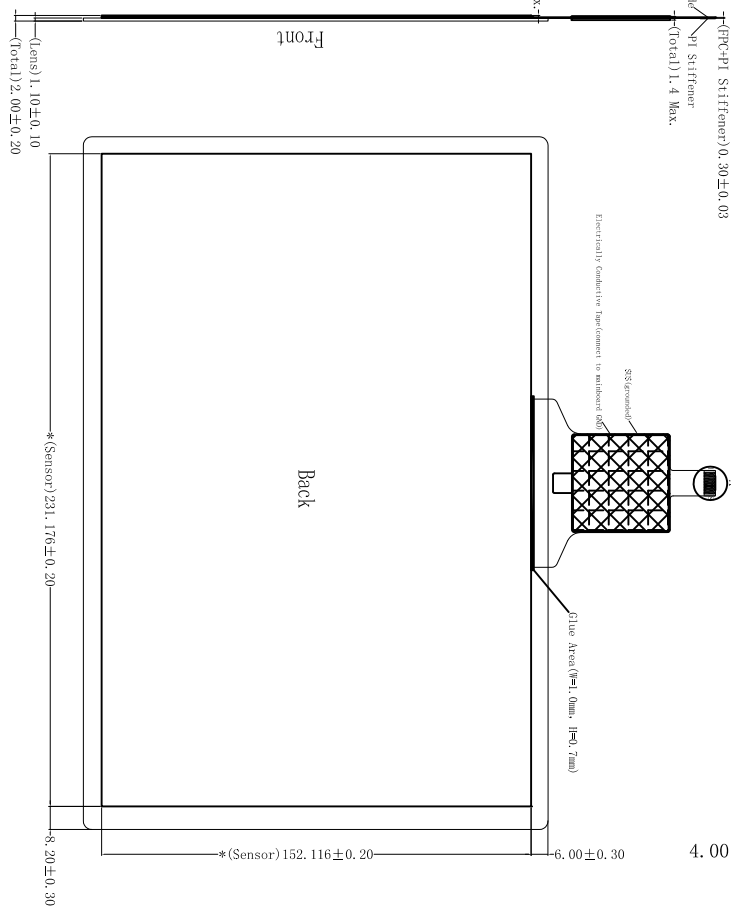

Comment:
 IC: mx11066T2
 VDD=3.3V±0.1V
 Undefined tolerance : ±0.20mm
 Operating temp. : -20~70℃
 Storage temp. : -30~80℃
 Dimensions marked with “()” are for reference
 Dimensions with * are pivotal

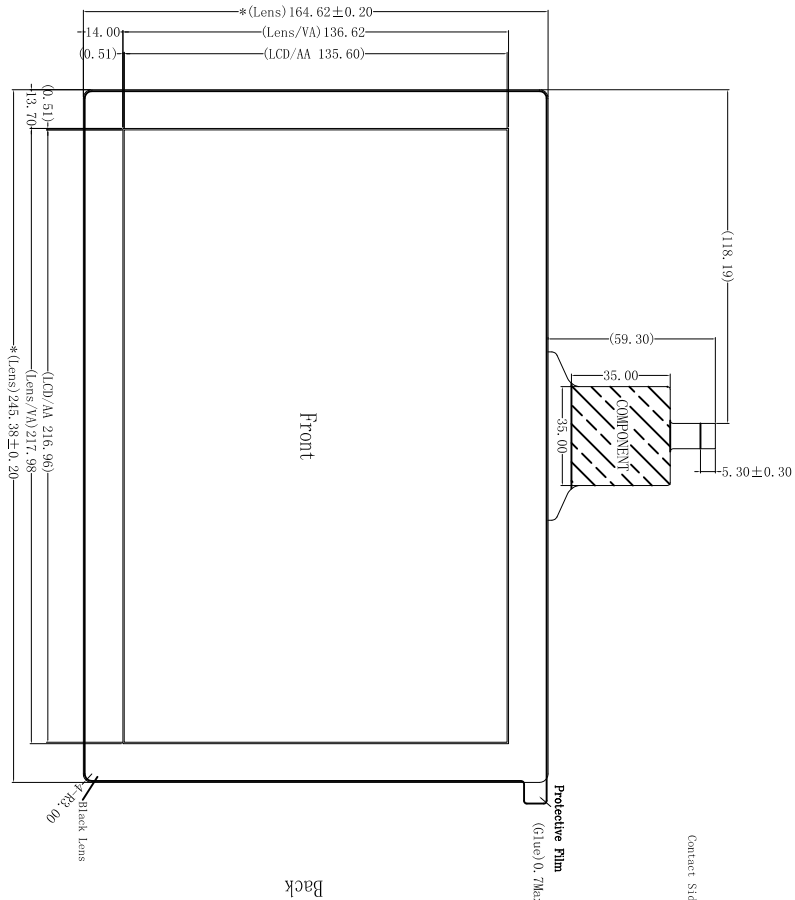

SHANTOU GOWORLD DISPLAY CO., LTD.
 Tel:0754-86192283 Fax:0754-86339619

DRAWN: 陈佳婷 周晓峰 2018-10-31
 CHECKED: 游荣鑫 2018-10-31
 APPROVED: 郑清交 2018-10-31

LOM NO: GWTC15838-CTPM/A
 DWG NO: ED-15838-CTPM/A
 Rev: 00
 UITS: mm
 SHEET 1 OF 1

CUSTOMER APPROVAL:

