






PIN DESCRIPTION	
1	GND
2	SCL
3	SDA
4	INT
5	RESET
6	VDD

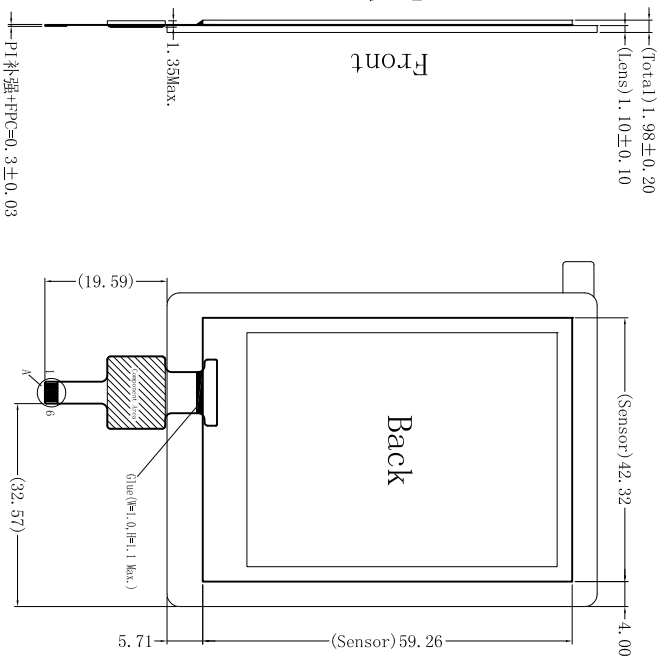

COMMENT:
 DRIVER IC: FT7401
 VDD=3.3 ± 0.1V
 Operating temp.: -20~+70° C
 Storage temp.: -30~80° C
 Undefined tolerance: ±0.20mm
 Dimensions with () are for reference
 Dimensions with * are pivotal

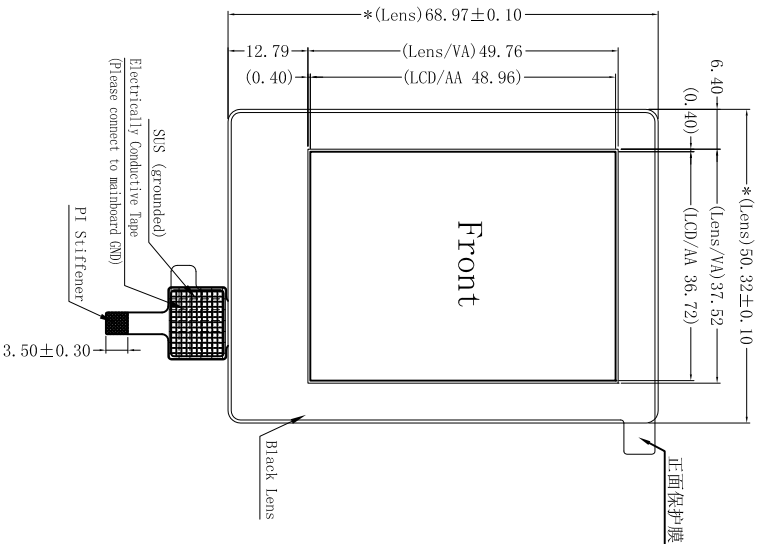

SHANTOU GOWORLD DISPLAY CO., LTD.
 Tel: 0754-88192283 Fax: 0754-86339619

DRAWN:

余齐冠

2018-12-28

CHECKED:

游荣鑫 周晓峰

2018-12-28

APPROVED:

郑清交

2018-12-28

A00: 首版, 14042sensor.

LCM NO: GWTC15953-CTPM/A

Rev: 00

UNITS: mm

DWG NO: ED-15953-CTPM/A

SHEET 1 OF 1

CUSTOMER APPROVAL:

This drawing contains confidential information and is the property of GOWORLD, without whose permission it may not be copied, shown or handed to a third party or otherwise used.

