




30PIN CNT DESCRIPTION	
1	NC
2	GND
3	LANE1-N
4	LANE1-P
5	GND
6	LANE0-N
7	LANE0-P
8	GND
9	AUX-CH-P
10	AUX-CH-N
11	GND
12	LCD-VCC
13	LCD-VCC
14	LCD-TEST
15	GND
16	GND
17	HPD
18	BL-GND
19	BL-GND
20	BL-GND
21	BL-GND
22	BL-ENABLE
23	BL-PWM
24	NC
25	NC
26	BL-POWER
27	BL-POWER
28	BL-POWER
29	BL-POWER
30	NC

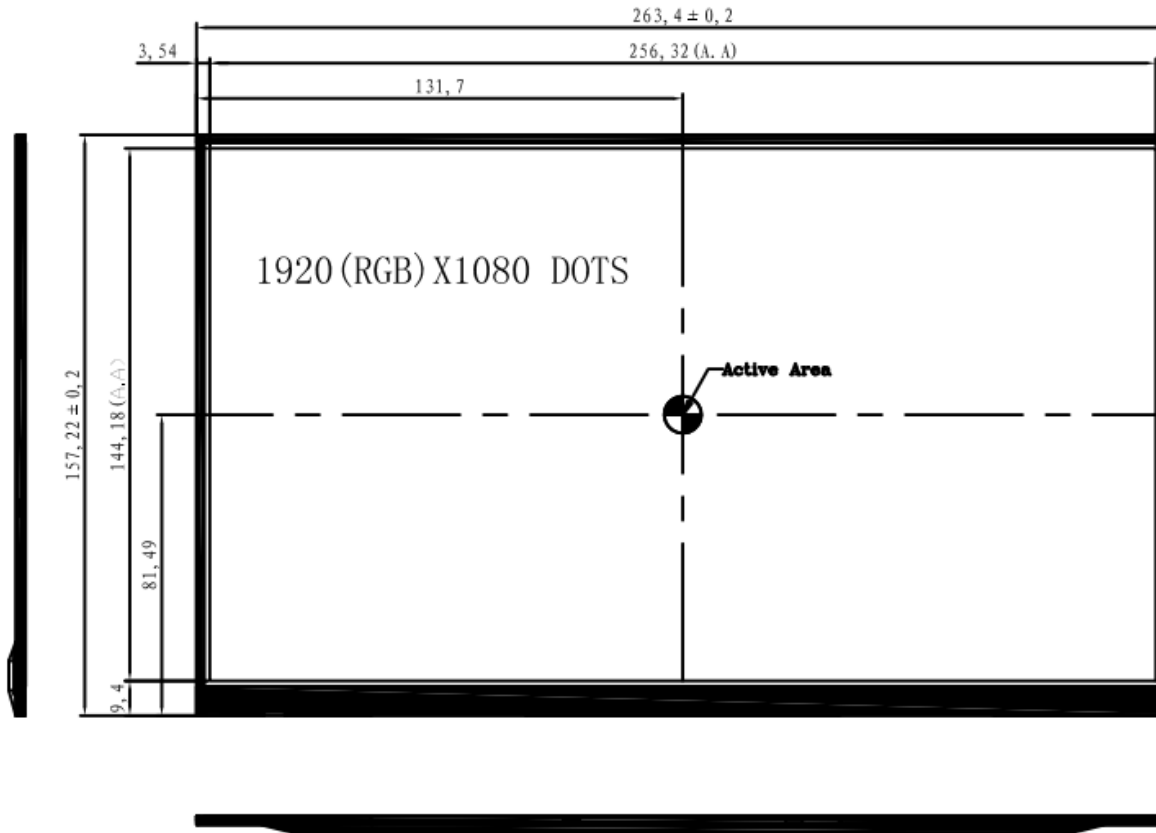

CUSTOMER APPROVAL:

This drawing contains confidential information and is the property of GOWORLD, without whose permission it may not be copied, shown or handed to a third party or otherwise used.



SHANTOU GOWORLD DISPLAY CO., LTD.

Tel: 0754-88192283 Fax: 0754-86339619

DRAWN:

余冰洁

2021.08.06

CHECKED:

陈秀丹

2021.08.06

APPROVED:

黄宏生

2021.08.06

LCM NO: GWMD00000-LCM/E


Rev: 00

UNITS: mm

DWG NO: ED-00000-LCM/E


SHEET 1 OF 3



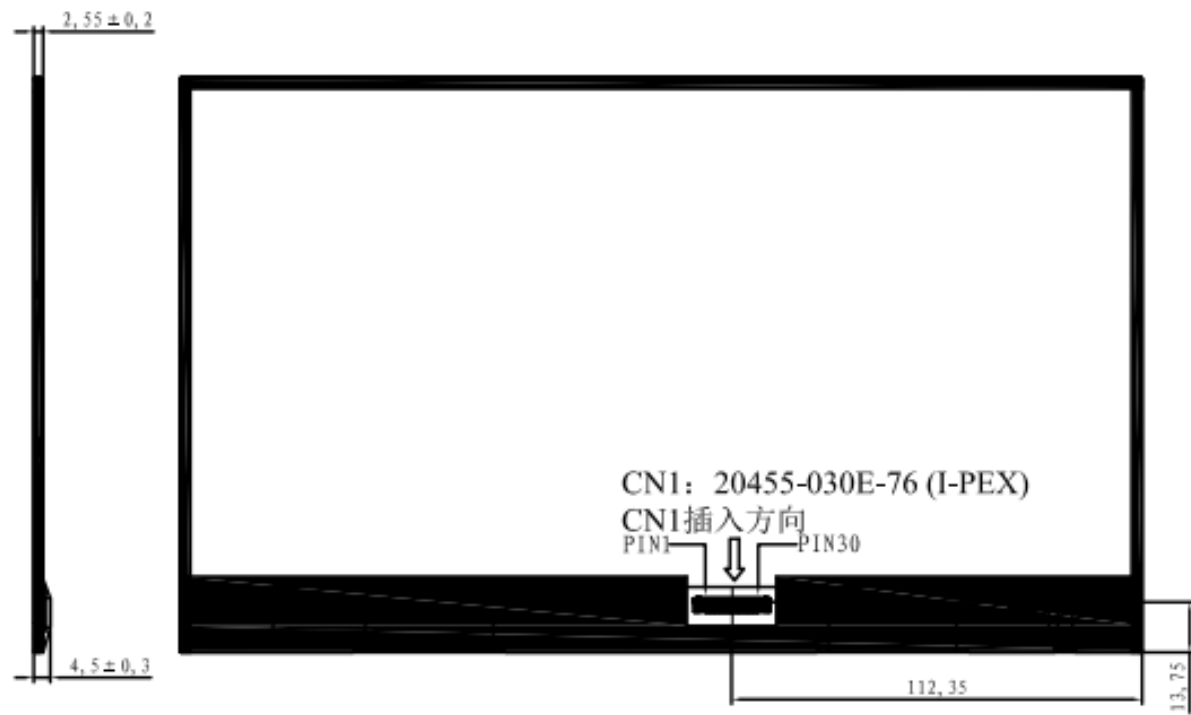

Notes:

1. Unit: mm.
2. Do not scale drawing.
3. All radii without dimension R0.2.
4. Modification Mark.
5. draft angle: 1°
6. Backlight luminance : 300cd/m² (Min) 350cd/m² (Typ)
7. Luminance uniformity: 75% (min) (min/max*100%)
8. UnSpecified Tolerance is ± 0.2
9. Operation conditions : If= 100mA, Vf=25-30V
Color coordinate: X=0.27-0.35, Y=0.27-0.35
10. All materials comply with RoHS
11. The measured value of luminance and color coordinate bases FX's BM-7
12. Check item: 1-9

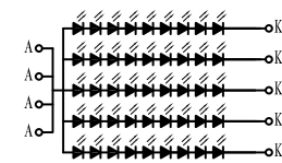

Backlight LED Circuit

CUSTOMER APPROVAL:

This drawing contains confidential information and is the property of GOWORLD, without whose permission it may not be copied, shown or handed to a third party or otherwise used.

SHANTOU GOWORLD DISPLAY CO., LTD.
Tel: 0754-88192283 Fax: 0754-86339619

DRAWN: 余冰洁 2021.08.06	CHECKED: 陈秀丹 2021.08.06	APPROVED: 黄宏生 2021.08.06
-----------------------------	-------------------------------	--------------------------------

LCM NO: GWMD00000-LCM/E	Rev: 00	UNITS: mm
DWG NO: ED-00000-LCM/E	SHEET 1 OF 3	

